

**SIDE LOADERS**



**"SNE" - series**

***Jumbo***

Manufactured by TERRA, Austria


## Manufacturer specifications and Quality characteristics

				JUMBO	JUMBO	JUMBO		
Identification	1	Name of manufacturer						
	2	Model		SNE 30/14(12)	SNE 40/14(12)	SNE 50/14(12)		
	3	Load capacity	Q without stabilisers	t	3	4	5	
	4	Load center	c	mm	700(600)	700(600)	700(600)	
	5	Power supply			electric	electric	electric	
	6	Type of control			rider controlled	rider controlled	rider controlled	
	7	Tyres	V-solid, L-pneumatic, front/rear		L/L	L/L	L/L	
	8	Wheels	(X=drive wheel)		2/2X	2/2X	2/2X	
Dimensions	9	Lift	h3 max. fork height	mm	4000	4000	4000	
	10		h2 free lift	mm	-	-	-	
	11	Carriage	fork spread max/min		mm	1220/300	1220/300	1220/360(300)
	12	Fork dimensions			mm	50/150/1400(1200)		50/180(150)/1400(1200)
	13	Tilt angle	down/up		Grad	474°	474°	474°
	14	Over all dimensions	L	overall length	mm	4045	4045	4045
			B	overall width	mm	2150(1950)	2150(1950)	2150(1950)
			h1	mast fully lowered	mm	2700	2700	2815
			h4	mast fully extended	mm	4760	4760	4970
			h6	overall height cabin	mm	2480	2480	2480
			19	Platform	b	platform width	mm	1400(1200)
	20		M	well width	mm	1300	1300	1300
	21		P	platform height	mm	770	770	770
	22	Mast reach	T	fork face standout	mm	100	100	100
			V	traverse stroke	mm	1500(1300)	1500(1300)	1500(1300)
			Lb		mm	832	832	832
	24	Rear overhang			mm	832	832	832
	25	Turning radius	outer/inner		mm	4150(4100)/550	4150(4100)/550	4150(4100)/550
	26		Ast		mm	2350(2150)	2350(2150)	2350(2150)
	27	Right angle stacking aisle	A1	right angle intersecting aisle	mm	4000(3900)	4000(3900)	4000(3900)
			A2	90° turning in the aisle	mm	5200(5100)	5200(5100)	5200(5100)
			travel speed with/without load		km/h	16/18	16/18	16/18
			lifting speed with/without load		m/s	0,35/0,5	0,35/0,5	0,3/0,5
30		lowering speed with/without load		m/s	0,5/0,4	0,5/0,4	0,5/0,4	
31		traverse speed		m/s	0,35	0,35	0,35	
32	Drawbar pull			daN	2500	2500	2500	
34	Gradeability	with/without load		%	16/29	13/26	10/24	
35	Truck weight*	without load		kg	6580(6400)	7030(6850)	7480(7300)	
36	Weight distribution	with load/front axle/rear axle		kg	5025/4555(4935/4465)	5750/5280(5660/5190)	6475/6005(6385/5915)	
		without load/front axle/rear axle		kg	3525/3055(3435/2965)	3750/3280(3660/3190)	3975/3505(3885/3415)	
38		front/rear		Stk.	2/2	2/2	2/2	
39	Tyres	size			27x10-12	27x10-12	27x10-12(20PR)	
		size			27x10-12	27x10-12	27x10-12(20PR)	
41	Wheelbase	y		mm	2300	2300	2300	
42	Track	front/rear		mm	1860/1860(1660/1660)			
43	Ground clearance	under mast		mm	160	160	160	
		at the lowest point		mm	160	160	160	
45	Service brake				front hydraulic / rear hydrostatic			
46	Parking brake				hydraulic spring storage			
47	Battery	model			0	PzS	0	
		voltage / capacity		V/Ah	80/490-740			
49	Drive engine	power rating S2 60 min		kW	20,0	20,0	20,0	
50	Pump engine	power rating S3 15%		kW	16,8	16,8	16,8	
51	Steering	drive engine / hydraulic			electric / electro hydraulic			
52	Steering control				servo			
53	Battery front	min. weight		kg	582	582	582	
54	Battery rear	min. weight		kg	873	873	873	
55	Standstability	EN 1726-1, EN 1551			jes			

Specifications are subject to change without notice.

\*battery weight: 1455 kg

Jдп.2007

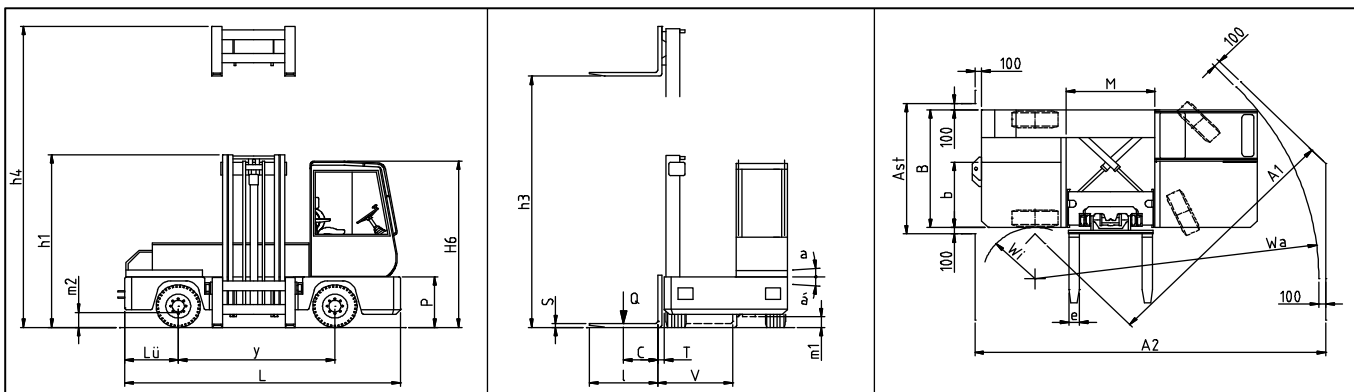

### CVH MATERIAL HANDLING

Москва, Каширское шоссе, 23 км, ТРАНССЕРВИС

TEL : 7 495 105 51 19

Web : <http://www.skladskoe.net>

E-mail : [Info@skladskoe.net](mailto:Info@skladskoe.net)

# Jumbo

Manufactured by TERRA, Austria